


trimless spot adjustable

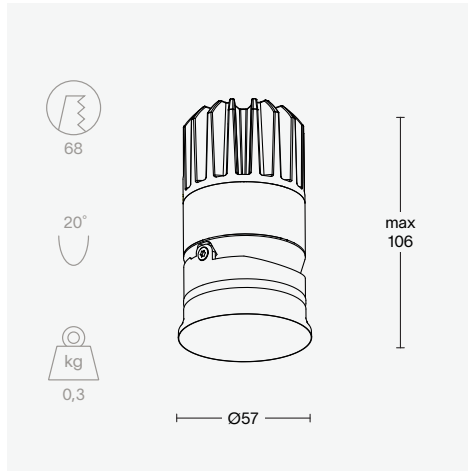

light specs

| | |
|-----------|------------|
| lamp | LED |
| reflector | glass lens |
| driver | excluded |
| IP | 44 |
| CRI | 90+ |
| class | III |

accessories

installation

| | |
|-------------|------------------|
| 8000 - 0003 | plaster ring Ø57 |
|-------------|------------------|

drivers

| | |
|-------------|---------------------------|
| 8000 - 0021 | DALI dimmable driver 38W |
| 8000 - 0022 | 0-10V dimmable driver 36W |
| 8000 - 0023 | non-dimmable driver 42W |
| 8000 - 0026 | DALI dimmable driver 60W |
| 8000 - 0027 | DALI deep dim driver 20W |

luminaire output

| | 2700K | | | 3000K | | |
|---------------|--------|--------|---------|--------|--------|---------|
| | 15° | 25° | 40° | 15° | 25° | 40° |
| 350mA (5.7W) | 290 lm | 420 lm | 585 lm | 325 lm | 460 lm | 645 lm |
| 500mA (8.5W) | 450 lm | 555 lm | 730 lm | 495 lm | 610 lm | 805 lm |
| 700mA (12.8W) | 505 lm | 720 lm | 955 lm | 560 lm | 795 lm | 1055 lm |
| 850mA (16.8W) | 570 lm | 815 lm | 1075 lm | 630 lm | 900 lm | 1180 lm |

order number

| | 2700K | | | 3000K | | |
|--------------|-------------|-------------|-------------|-------------|-------------|-------------|
| | 15° | 25° | 40° | 15° | 25° | 40° |
| black ano. | 8000 - 1111 | 8000 - 1112 | 8000 - 1113 | 8000 - 1114 | 8000 - 1115 | 8000 - 1116 |
| white struc. | 8000 - 1117 | 8000 - 1118 | 8000 - 1119 | 8000 - 1120 | 8000 - 1121 | 8000 - 1122 |