
[installation](#)


## surface spot

### light specs

lamp	LED	
optics	25° glass	40° glass
	60° glass	
driver	excluded	
IP	44 (60° glass)	65 (25°, 40° glass)
CRI	90+	97
SDCM	SDCM2	
class	class III	
location	indoor	
marking	CE	

### accessories

	driver
DALI dimmable driver 38W	8000-0021
0-10V dimmable driver 36W	8000-0022
non-dimmable driver 42W	8000-0023
Casambi dimmable driver 38W	8000-0028
DALI dimmable driver 60W	8000-0026
DALI deep dim driver 20W - 350mA	8000-0031
DALI deep dim driver 20W - 500mA	8000-0030
DALI deep dim driver 20W - 700mA	8000-0027
DALI dimmable power converter 48V to 350-700mA	8000-0037
TRIAC dimmable driver 7W - 350mA	8000-0034
TRIAC dimmable driver 10W - 500mA	8000-0035
TRIAC dimmable driver 14W - 700mA	8000-0046
TRIAC dimmable driver mini 10W - 350mA	8000-0043
TRIAC dimmable driver mini 10W - 500mA	8000-0044

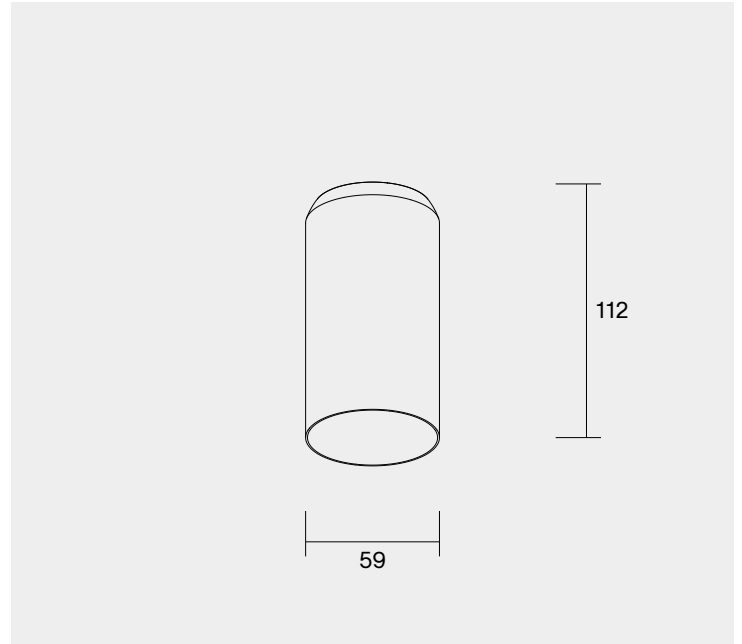

## surface spot

### luminaire output

	2700K			3000K		
	25° glass	40° glass	60° glass	25° glass	40° glass	60° glass
350mA (6.0W)	375lm	500lm	500lm	400lm	525lm	525lm
500mA (8.9W)	550lm	700lm	675lm	575lm	725lm	700lm
700mA (13.0W)	725lm	950lm	925lm	750lm	975lm	950lm