


acrobat mini trim short

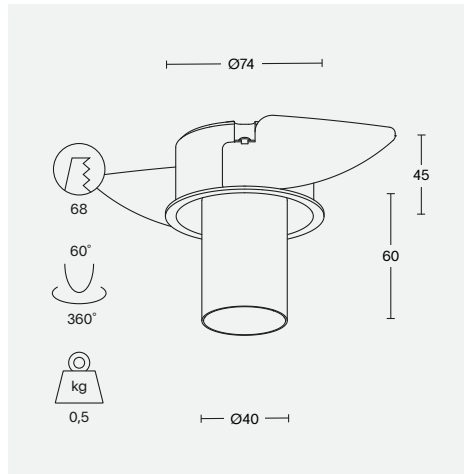

light specs

| | |
|-----------|----------|
| lamp | LED |
| reflector | lens |
| driver | excluded |
| IP | 20 |
| CRI | 90+ / 97 |
| class | III |

accessories

drivers

| | |
|-------------|---------------------------|
| 8000 - 0021 | DALI dimmable driver 38W |
| 8000 - 0022 | 0-10V dimmable driver 36W |
| 8000 - 0023 | non-dimmable driver 42W |
| 8000 - 0026 | DALI dimmable driver 60W |
| 8000 - 0027 | DALI deep dim driver 20W |

luminaire output

| | 2700K | | | | 3000K | | | |
|--------------|--------|--------|--------|--------|--------|--------|--------|--------|
| | 10° | 20° | 40° | 60° | 10° | 20° | 40° | 60° |
| 350mA (5.7W) | 325 lm | 525 lm | 525 lm | 525 lm | 350 lm | 550 lm | 550 lm | 550 lm |
| 500mA (8.5W) | | | 710 lm | | | | 750 lm | |

order number

| | 2700K | | | | 3000K | | | |
|--------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| | 10° | 20° | 40° | 60° | 10° | 20° | 40° | 60° |
| black ano. | 8000-2416 | 8000-2012 | 8000-2030 | 8000-2594 | 8000-2417 | 8000-2013 | 8000-2031 | 8000-2595 |
| white struc. | 8000-2418 | 8000-2016 | 8000-2034 | 8000-2598 | 8000-2419 | 8000-2017 | 8000-2035 | 8000-2599 |