


## light + ventilation mini

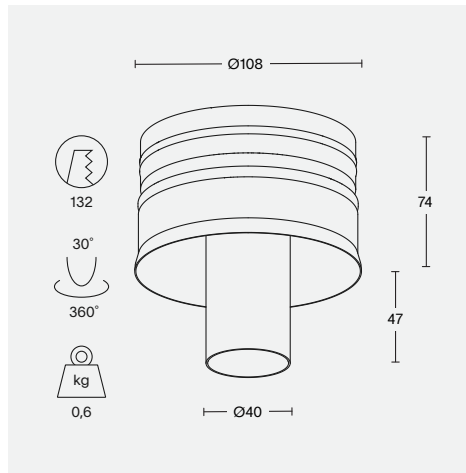

## light specs

lamp	LED
reflector	lens
driver	excluded
IP	44
CRI	90+ / 97
class	III

## ventilation specs

type	air extraction
air flow	max. 50m <sup>3</sup> /h
pressure	7 - 75 Pa
noise level	< 25 dB(A)
adjustment	32 steps
lock mechanism	integrated

## luminaire output

	2700K		3000K	
	20°	40°	20°	40°
350mA (5.7W)	525 lm	525 lm	550 lm	550 lm
500mA (8.5W)	710 lm	710 lm	750 lm	750 lm
700mA (12.8W)		950 lm		1000 lm


## order number

	2700K		3000K	
	20°	40°	20°	40°
black ano.	8000 - 1778	8000 - 1411	8000 - 1789	8000 - 1412
white struc.	8000 - 1782	8000 - 1415	8000 - 1783	8000 - 1416


# light + ventilation mini

## ventilation - capacity graphs

### air extraction

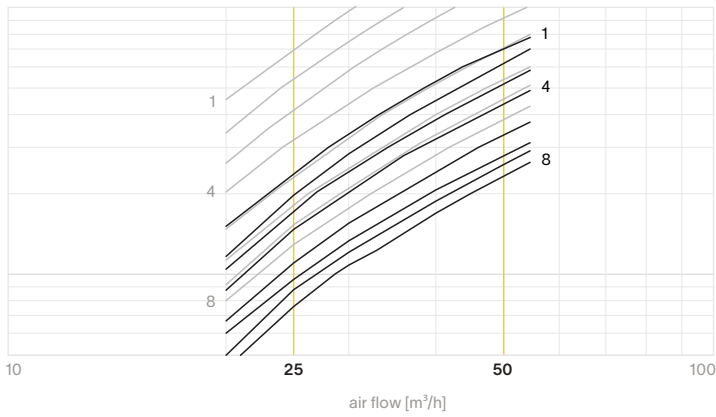

### air supply\*

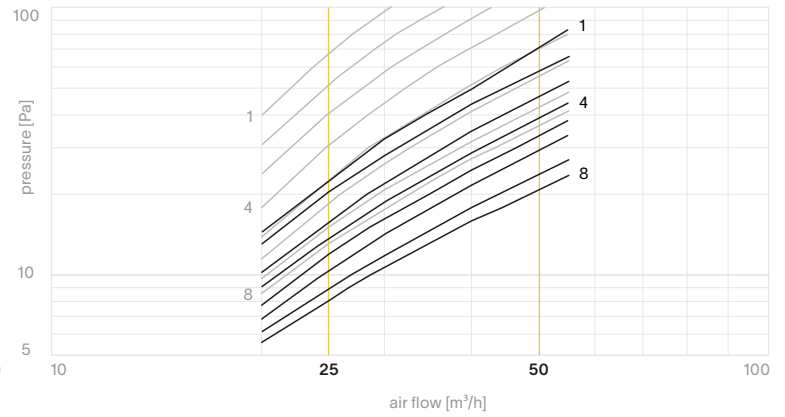

— with 25m³/h ring

— without 25m³/h ring

\*downward airflow not suited for installation in or above comfort zones

## accessoires

### installation

8000 - 0001

plaster ring Ø108

### drivers

8000 - 0021

DALI dimmable driver 38W

8000 - 0022

1-10V dimmable driver 36W

8000 - 0023

non-dimmable driver 42W

8000 - 0026

DALI dimmable driver 60W

8000 - 0027

DALI deep dim driver 20W