


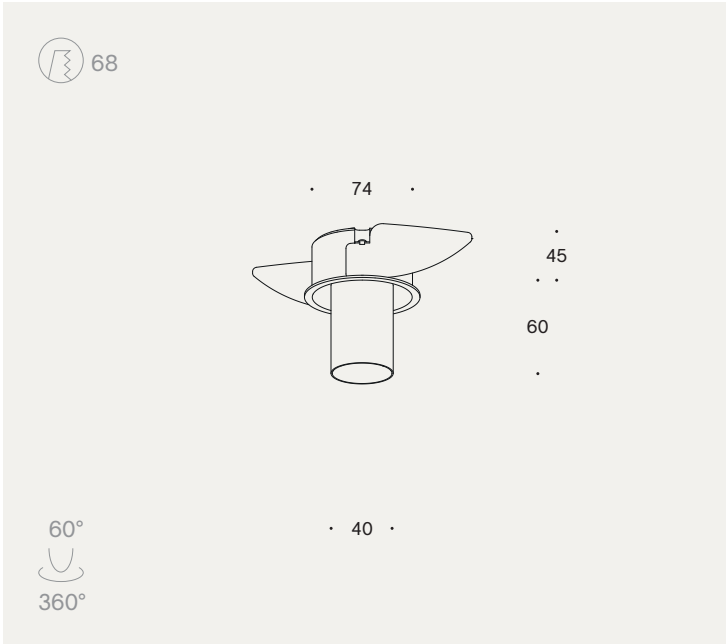

acrobat mini trim short

installation

light specs

lamp	LED	
optic	lens	
driver	excluded	
IP	20	
CRI	90+	97
SDCM	SDCM2	
class	class III	
drill hole size	68	
recess height	45	
tilt	60°	
location	indoor	
marking	CE	

accessories

	driver
DALI dimmable driver 38W	8000-0021
0-10V dimmable driver 36W	8000-0022
non-dimmable driver 42W	8000-0023
DALI dimmable driver 60W	8000-0026
DALI deep dim driver 20W	8000-0027

luminaire output

	2700K				3000K			
	10°	20°	40°	60°	10°	20°	40°	60°
350mA (5.7W)	425lm	525lm	525lm	525lm	450lm	550lm	550lm	550lm
500mA (8.5W)	-	-	710lm	-	-	-	750lm	-