


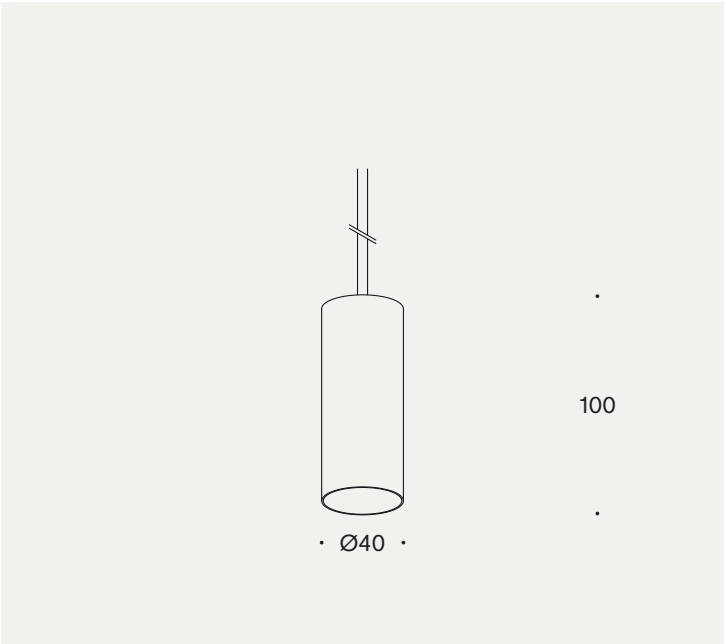

installation

pendant mini

light specs

lamp	LED	
optic	lens	
driver	excluded	
IP	20	
CRI	90+	97
SDCM	SDCM2	
class	class III	
recess height	45	
wire lenght	2000mm	
fixation	ceiling disc (included)	
location	indoor	
marking	CE	

accessories

		installation
plaster ring Ø57	8000-0003	
adjustable thick plaster ring Ø57 (12-33mm)	8000-0103	
adjustable thin plaster ring Ø57 (3.6-20mm)	8000-0123	
clt csc ring Ø57	8000-0013	
concrete ring + cap Ø57	8000-0113	
		drivers
DALI dimmable driver 38W	8000-0021	
0-10V dimmable driver 36W	8000-0022	
non-dimmable driver 42W	8000-0023	
DALI dimmable driver 60W	8000-0026	
DALI deep dim driver 20W	8000-0027	

luminaire output

	2700K				3000K			
	10°	20°	40°	60°	10°	20°	40°	60°
350mA (5.7W)	425lm	525lm	525lm	525lm	450lm	550lm	550lm	550lm
500mA (8.5W)	-	710lm	710lm	710lm	-	750lm	750lm	750lm
700mA (12.8W)	-	-	950lm	-	-	-	1000lm	-