


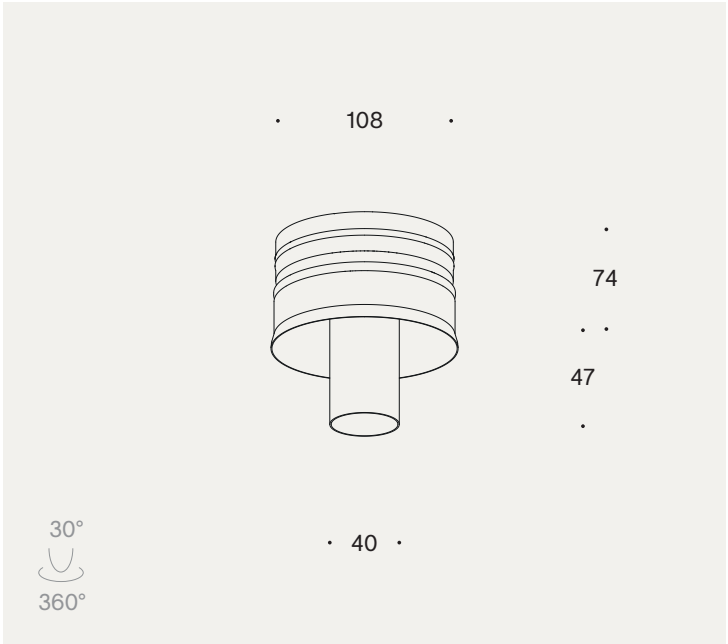

installation

light + ventilation mini

light specs

lamp	LED	
optic	lens	
driver	excluded	
IP	20	
CRI	90+	97
SDCM	SDCM2	
class	class III	
tilt	30°	
location	indoor	
marking	CE	

ventilation specs

type / air flow	air extraction	max. 50 m³/h
	air supply	max. 30 m³/h
pressure	7-75Pa	
noise level	<25dB(A)	
adjustment	32 steps	
lock mechanism	integrated	

luminaire output

	2700K				3000K			
	10°	20°	40°	60°	10°	20°	40°	60°
350mA (5.7W)	425lm	525lm	525lm	525lm	450lm	550lm	550lm	550lm
500mA (8.5W)	-	710lm	710lm	710lm	-	750lm	750lm	750lm
700mA (12.8W)	-	-	950lm	-	-	-	1000lm	-



installation

light + ventilation mini

accessories

	installation
plaster ring Ø108	8000-0001
adjustable thick plaster ring Ø108 (12-33mm)	8000-0101
clt csc ring Ø108	8000-0011
concrete ring + cap Ø108	8000-0111

	drivers
DALI dimmable driver 38W	8000-0021
0-10V dimmable driver 36W	8000-0022
non-dimmable driver 42W	8000-0023
DALI dimmable driver 60W	8000-0026
DALI deep dim driver 20W	8000-0027