prado

acrobat mini trim
installation instruction

Cut a round hole (Ø 68). Consult the chosen luminaire tech specs for required height and free air dimensions.

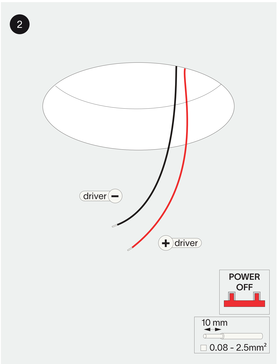

constant current (mA)	typical forward voltage (V)	typical power (W)
350	16,9	5,9
500	17,4	8,7
700	18,2	12,7

see packaging or fixture label for maximum current

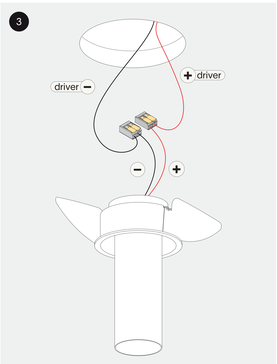

connect the wires with wago connectors
for serial connection, respect polarity
combine with a prado LED-driver



bend over the springs and push the luminaire into the ceiling



twist the luminaire as desired
thank you for choosing prado

Replace lens when broken.
Luminaire shall only be used together with its lens.

prado.eu

The light source in this luminaire shall only be replaced by the manufacturer or a similar qualified person. Warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair the product.