


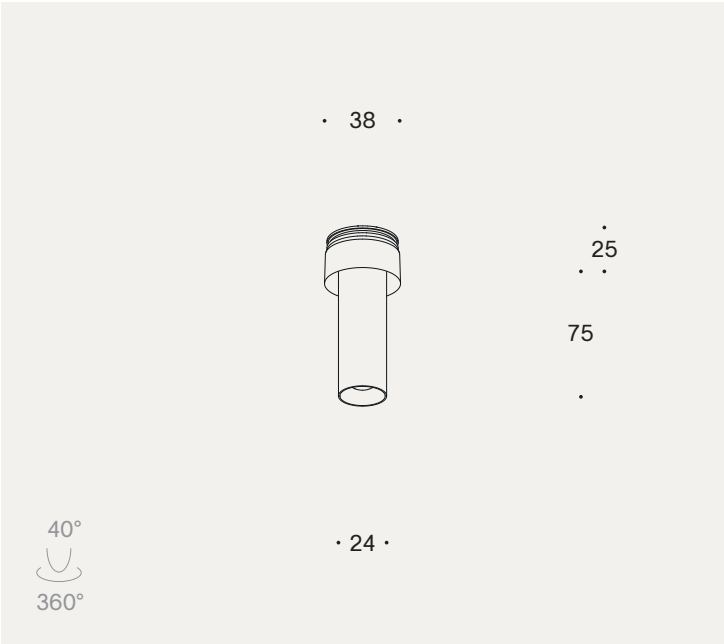

acrobat micro long

installation

light specs

lamp	LED	
optic	lens	
driver	excluded	
IP	20	
CRI	90+	97
SDCM	SDCM2	
class	class III	
recess height	25	
tilt	40°	
location	indoor	
marking	CE	

accessories

installation	
plaster ring Ø38	8000-0004
adjustable thick plaster ring Ø38 (12-33mm)	8000-0104
adjustable thin plaster ring Ø38 (3.6-20mm)	8000-0124
clt csc ring Ø38	8000-0014
drivers	
DALI 1-10V dimmable driver 55W for micro	8000-0032

luminaire output

	2700K				3000K			
	10°	20°	30°	50°	10°	20°	30°	50°
1050mA (3.2W)	225lm	-	225lm	225lm	250lm	-	250lm	250lm
1400mA (4.6W)	250lm	-	250lm	250lm	300lm	-	300lm	300lm