




acrotrack micro short

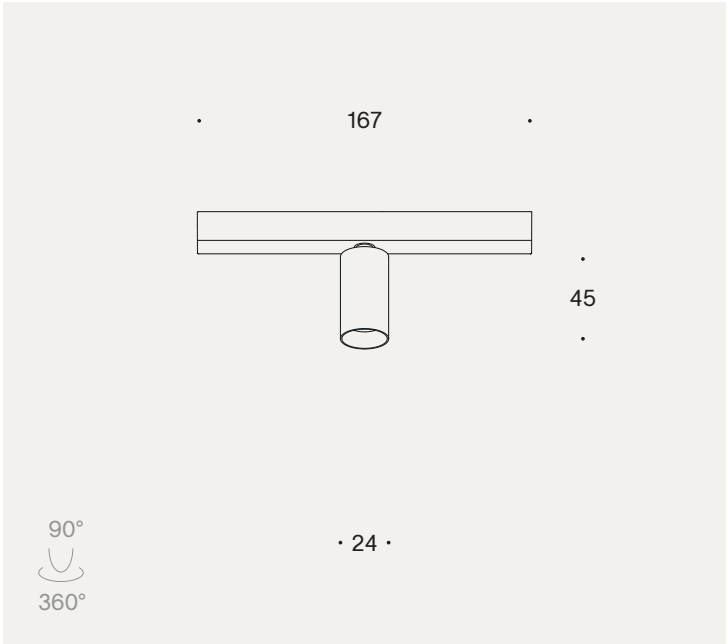

installation

light specs

lamp	LED	
optic	lens	
driver	excluded	
IP	20	
CRI	90+	97
SDCM	SDCM2	
class	class III	
tilt	90°	
location	indoor	
marking	CE	

accessories

drivers	
48V driver 70W constant voltage	8000-0024
48V driver 150W constant voltage	8000-0025
48V driver 240V constant voltage	8000-0033

luminaire output

	2700K				3000K			
	10°	20°	30°	50°	10°	20°	30°	50°
1050mA (4.6W)	225lm	-	225lm	225lm	250lm	-	250lm	250lm