

light+motion+ventilation trim short 2.0


installation

light specs	
lamp	LED
optic	diffuser
driver	excluded
IP	20
CRI	90+
SDCM	SDCM2
class	class III
drill hole size	132
tilt	30°
location	indoor
marking	CE

luminaire output	2700K	3000K
	550lm	550lm
	550lm	550lm
	700lm	700lm

motion specs	
motion detector	passive infrared sensor (PIR)
detection angle	h360 v100
light sensor	integrated
time on	5min after last movement detection
other	potential-free relay integrated
	patent pending

ventilation specs		
type / air flow	air extraction	max. 50 m³/h
	air supply	max. 30 m³/h
pressure	7-75Pa	
noise level	<25dB(A)	
adjustment	32 steps	
lock mechanism	integrated	

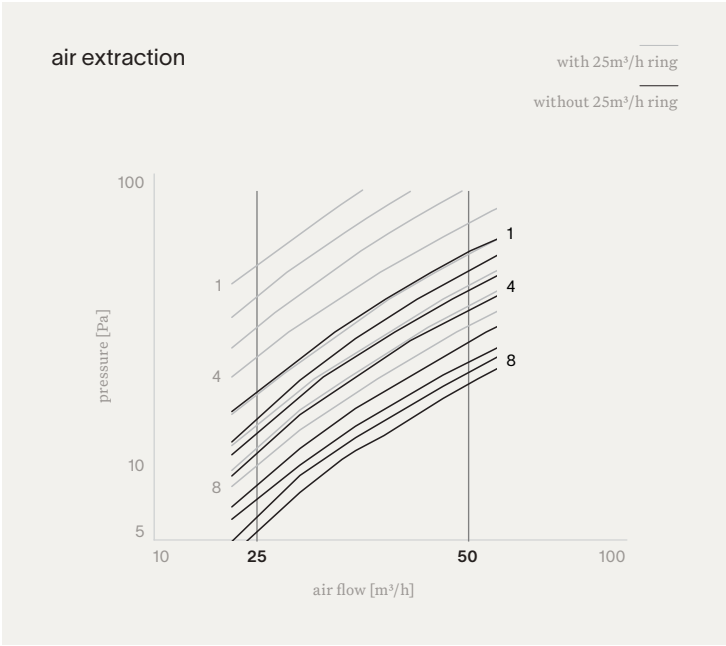

light+motion+ventilation trim short 2.0

installation

accessories

	drivers
48V driver 15W constant voltage	8000-0029
48V driver 70W constant voltage	8000-0024
48V driver 150W constant voltage	8000-0025
48V driver 240V constant voltage	8000-0033