


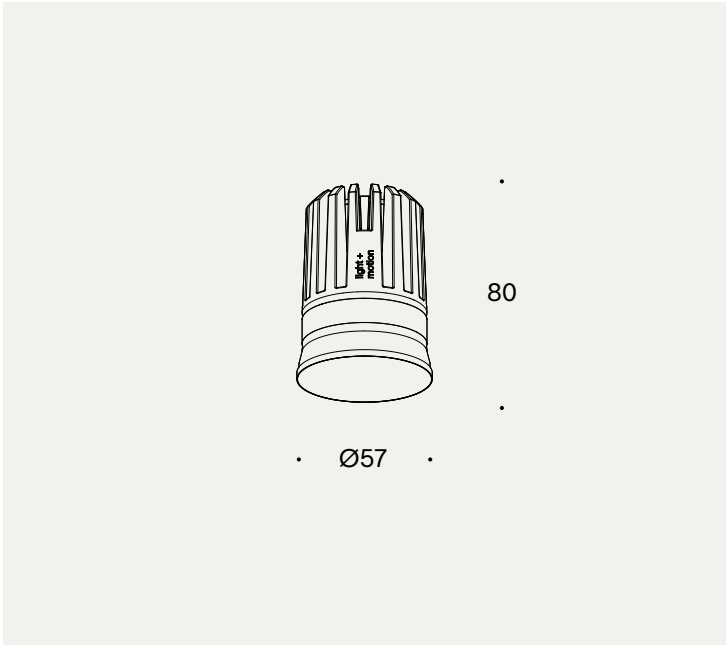

light + motion trimless 2.0

[installation instructions](#)

light specs


lamp	LED
optics	diffuser
driver	excluded
IP	↑ 20
CRI	90+
class	class III

motion specs

motion detector	passive infrared sensor (PIR)
detection angle	h 360 v 100
light sensor	integrated
time on	5min after last movement detection
other	potential-free relay integrated
	patent pending

luminaire output

	2700K	3000K
48V (8.2W) - black ano	550 lm	550 lm
48V (8.2W) - white struc	700 lm	700 lm

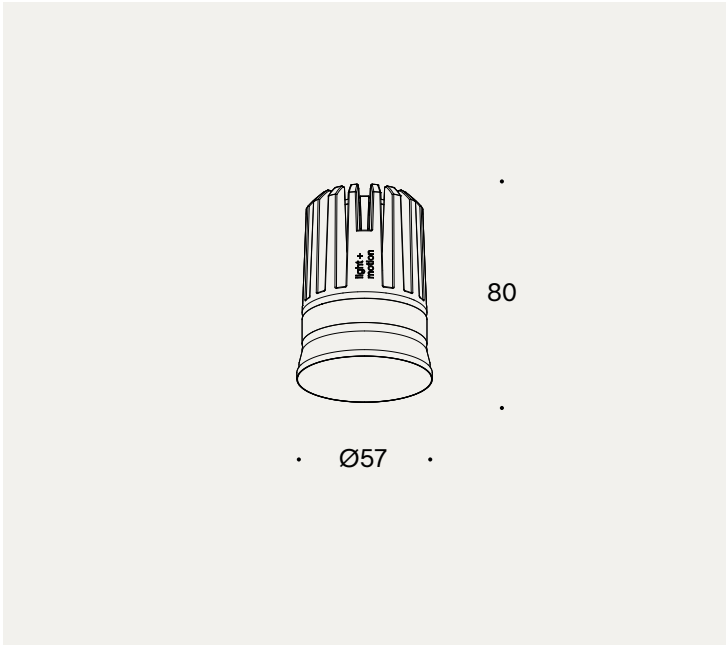

light + motion trimless 2.0

accessories

	installation
plaster ring Ø57	8000-0003
clt csc ring Ø57	8000-0013
adjustable thick plaster ring Ø57 (12-33mm)	8000-0103
adjustable thin plaster ring Ø57 (3.6-20mm)	8000-0123
concrete ring + cap Ø57	8000-0113

	drivers
48V driver 15W constant voltage	8000-0029
48V driver 70W constant voltage	8000-0024
48V driver 150W constant voltage	8000-0025

order number

	2700K	3000K
black ano	8000-6868	8000-6869
white struc	8000-6870	8000-6905