


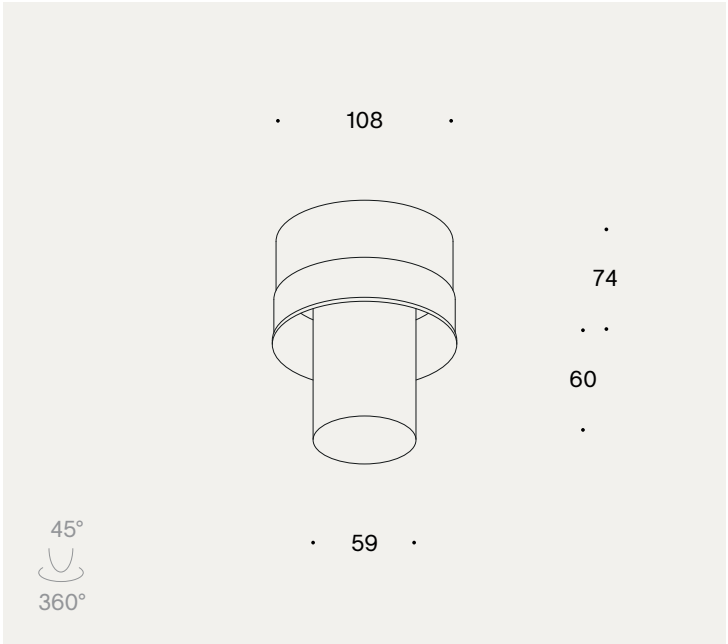

light only + motion long 2.0

installation

light specs		
lamp	LED	
optic	diffuser	
driver	excluded	
IP	20	
CRI	90+	
SDCM	SDCM2	
class	class III	
recess height	74	
tilt	45°	
location	indoor	

luminaire output

	2700K	3000K
48V - 8.2W black ano	550lm	550lm
48V - 8.2W white struc	700lm	700lm

motion specs	
motion detector	passive infrared sensor (PIR)
detection angle	h360 v100
light sensor	integrated
time on	5min after last movement detection
other	potential-free relay integrated
	patent pending

accessories

	installation
plaster ring Ø108	8000-0001
adjustable thick plaster ring Ø108 (12-33mm)	8000-0101
clt csc ring Ø108	8000-0011
concrete ring + cap Ø108	8000-0111
	drivers
48V driver 15W constant voltage	8000-0029
48V driver 70W constant voltage	8000-0024
48V driver 150W constant voltage	8000-0025
48V driver 240V constant voltage	8000-0033