


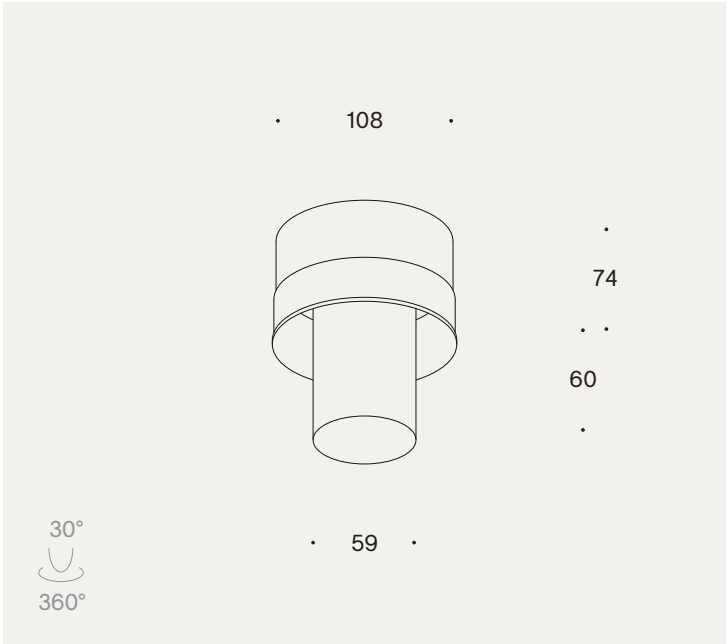

light + motion + ventilation long 2.0



installation

light specs		
lamp	LED	
optic	diffuser	
driver	excluded	
IP	20	
CRI	90+	
SDCM	SDCM2	
class	class III	
tilt	30°	
location	indoor	
marking	CE	

luminaire output			
	2700K	3000K	
48V - 8.2W black ano	550lm	550lm	
48V - 8.2W white struc	700lm	700lm	

motion specs		
motion detector	passive infrared sensor (PIR)	
detection angle	h360 v100	
light sensor	integrated	
time on	5min after last movement detection	
other	potential-free relay integrated	
	patent pending	

ventilation specs		
type / air flow	air extraction	max. 50 m³/h
	air supply	max. 30 m³/h
pressure	7-75Pa	
noise level	<25dB(A)	
adjustment	32 steps	
lock mechanism	integrated	

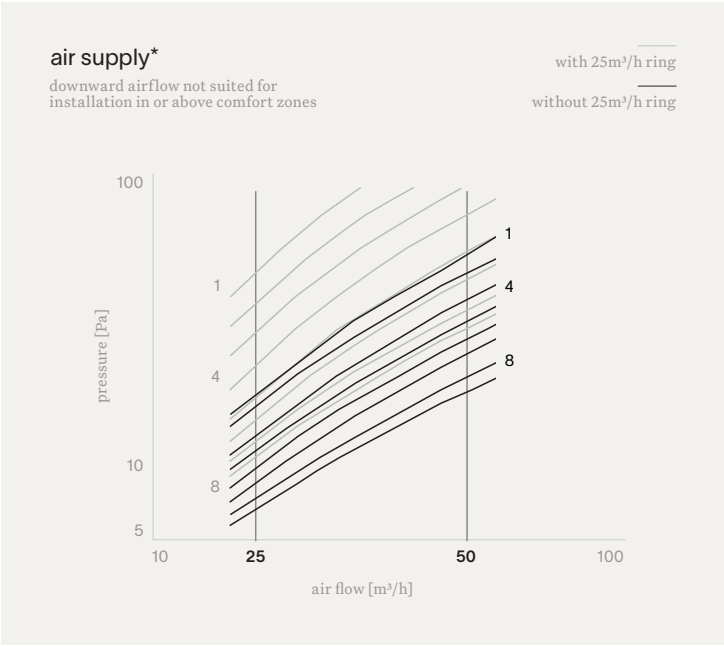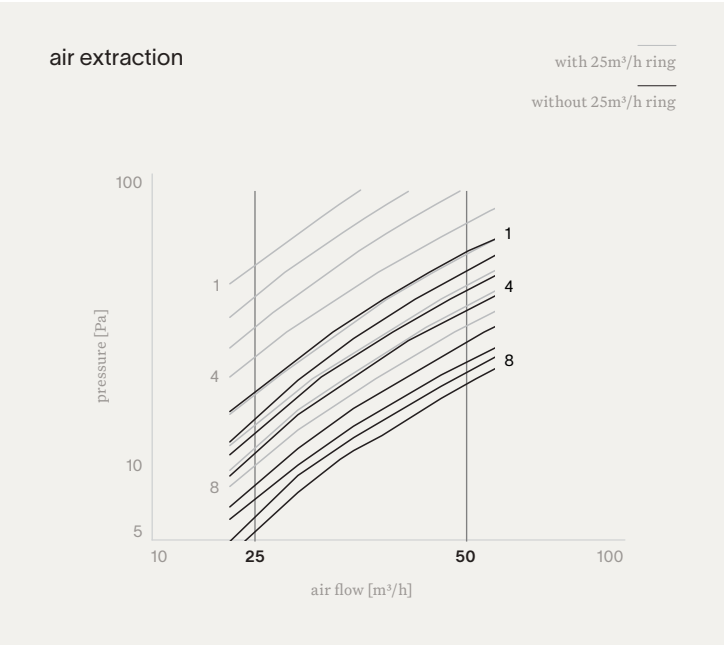

light + motion + ventilation long 2.0



installation

accessories

	installation
plaster ring Ø108	8000-0001
adjustable thick plaster ring Ø108 (12-33mm)	8000-0101
clt csc ring Ø108	8000-0011
concrete ring + cap Ø108	8000-0111

	drivers
48V driver 15W constant voltage	8000-0029
48V driver 70W constant voltage	8000-0024
48V driver 150W constant voltage	8000-0025
48V driver 240V constant voltage	8000-0033