


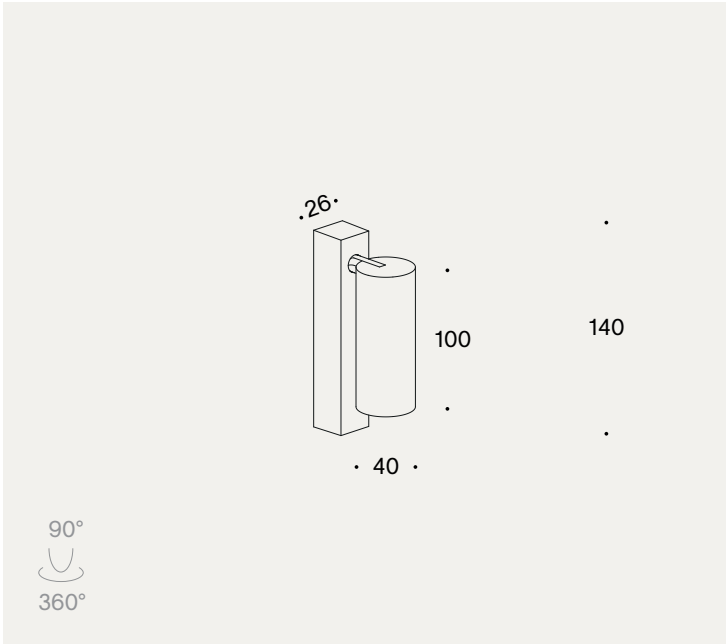

acrobat outdoor surface box

installation

light specs		
lamp	LED	
optic	glass lens	
driver	excluded	
IP	65	
CRI	90+	
SDCM	SDCM2	
class	class III	
tilt	90°	
location	outdoor	
marking	CE	

luminaire output

	40°	
	2700K	3000K
350mA (5.7W)	525lm	550lm
500mA (8.5W) / 24V	710lm	750lm
700mA (12.8W)	950lm	1000lm

accessories	
drivers - cv	
IP68 non dimmable driver 42W constant current 500mA	8000-0038
IP68 dali dimmable driver 38W constant current 500mA	8000-0039
IP68 24V constant voltage dali pwm driver 60W	8000-0040
IP68 24V constant voltage dali pwm driver 120W	8000-0041
IP68 24V constant voltage dali pwm push driver 200W	8000-0042
drivers - cc	
DALI dimmable driver 38W	8000-0021
0-10V dimmable driver 36W	8000-0022
non-dimmable driver 42W	8000-0023
DALI dimmable driver 60W	8000-0026