
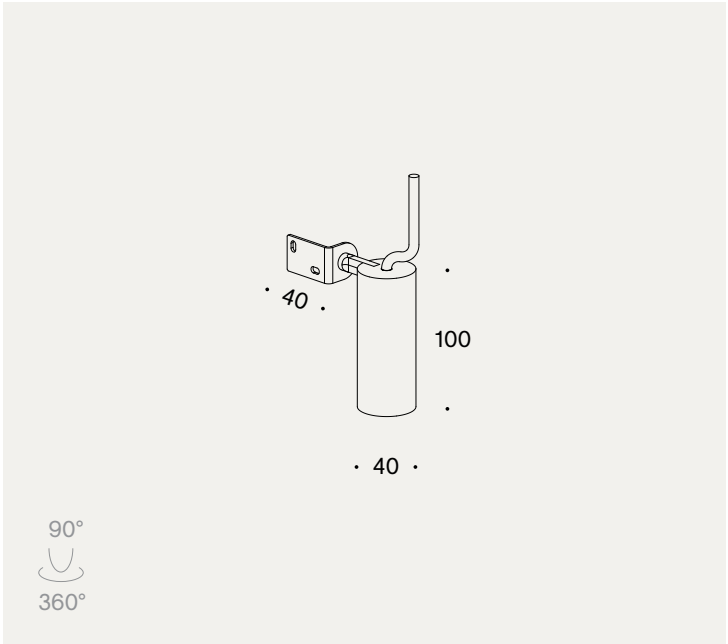




acrobat outdoor L-bracket

installation

light specs		
lamp	LED	
optic	glass lens	
driver	excluded	
IP	65	
CRI	90+	
SDCM	SDCM2	
class	class III	
tilt	90°	
location	outdoor	
marking	CE	

accessories		
drivers		
IP68 non dimmable driver 42W constant current 500mA 8000-0038		
IP68 dali dimmable driver 38W constant current 500mA 8000-0039		
DALI dimmable driver 38W 8000-0021		
0-10V dimmable driver 36W 8000-0022		
non-dimmable driver 42W 8000-0023		
DALI dimmable driver 60W 8000-0026		

luminaire output		
40°		
2700K 3000K		
350mA (5.7W)	525lm	550lm
500mA (8.5W)	710lm	750lm
700mA (12.8W)	950lm	1000lm