


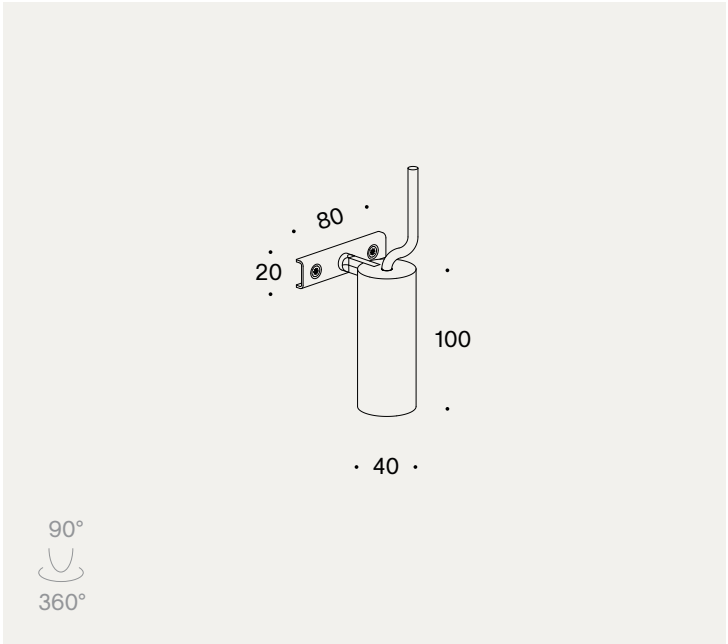

acrobat outdoor bracket

installation

light specs	
lamp	LED
optic	glass lens
driver	excluded
IP	65
CRI	90+
SDCM	SDCM2
class	class III
tilt	90°
location	outdoor
marking	CE

luminaire output		
	40°	
	2700K	3000K
350mA (5.7W)	525lm	550lm
500mA (8.5W)	710lm	750lm
700mA (12.8W)	950lm	1000lm

accessories	
drivers	
IP68 non dimmable driver 42W constant current 500mA	8000-0038
IP68 dali dimmable driver 38W constant current 500mA	8000-0039
DALI dimmable driver 38W	8000-0021
0-10V dimmable driver 36W	8000-0022
non-dimmable driver 42W	8000-0023
DALI dimmable driver 60W	8000-0026