


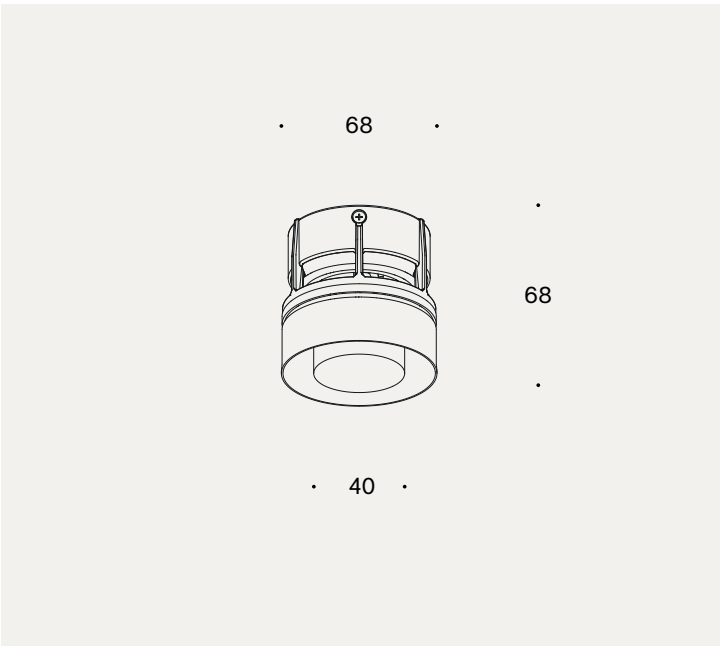

installation

light + ventilation | mini

light specs


lamp	LED	
optics	lens	40° glass
driver	excluded	
IP	65	
CRI/Ra	97	
SDCM	SDCM2	
class	III	
tilt	0°	
location	indoor	
marking	CE	
other	patent pending	

luminaire output

	2700K	3000K
350mA (6.0W)	475lm	500lm
500mA (8.9W)	650lm	675lm

ventilation specs

air flow	air extraction	max. 30 m³/h
pressure	15-65Pa	
noise level	<25dB(A)	
adjustment	20 steps	
lock mechanism	integrated	

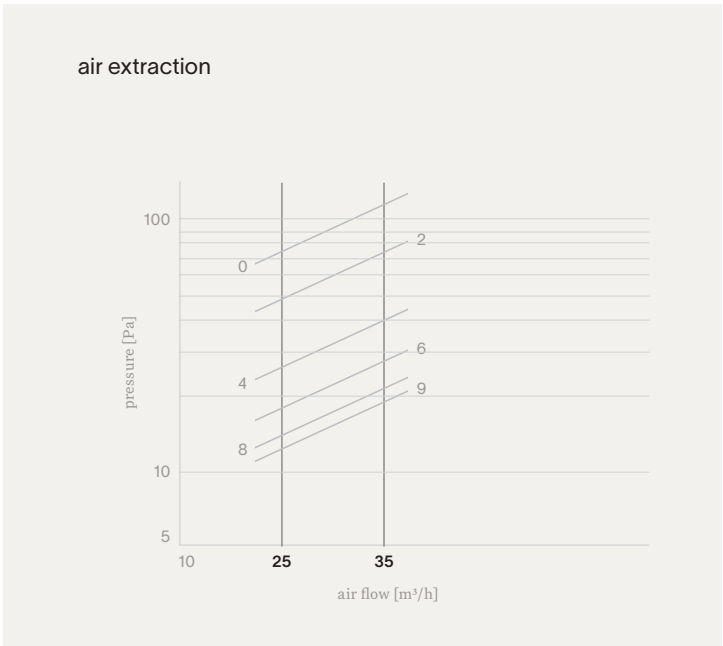

light + ventilation | mini

accessories

	product code
adj. plaster ring Ø68 - ventilation duct Ø100	8000-8460
adj. plaster ring Ø68 - ventilation duct Ø125	8000-8461

drivers

	product code
DALI dimmable driver 38W	8000-0021
0-10V dimmable driver 36W	8000-0022
non-dimmable driver 42W	8000-0023
DALI dimmable driver 60W	8000-0026
DALI deep dim driver 20W	8000-0027