


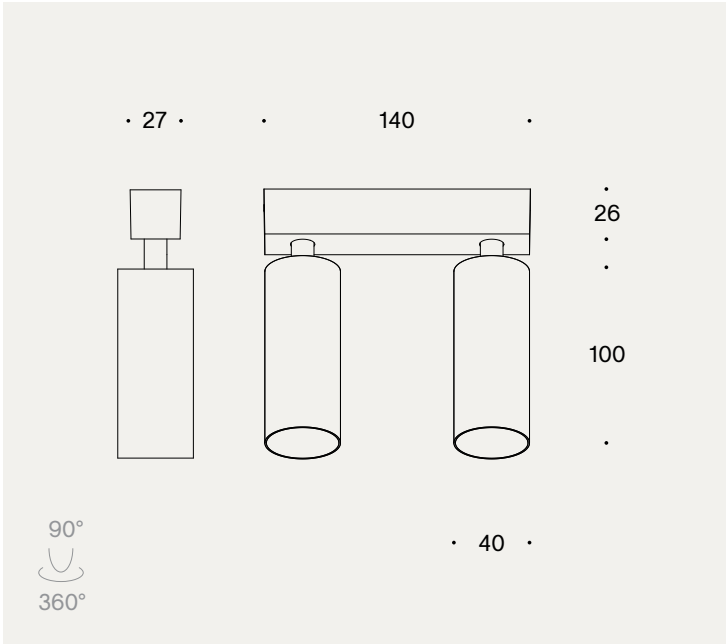

acrobat surface box mini | double long

installation

light specs		
lamp	LED	
optic	lens	
driver	excluded	
IP	20	
CRI	90+	97
SDCM	SDCM2	
class	class III	
tilt	90°	
ceiling base dimensions	140 x 26 x 27 (l x w x h)	
location	indoor	
marking	CE	

accessories	
drivers	
DALI dimmable driver 38W	8000-0021
0-10V dimmable driver 36W	8000-0022
non-dimmable driver 42W	8000-0023
DALI dimmable driver 60W	8000-0026
DALI deep dim driver 20W	8000-0027

luminaire output				
	2700K		3000K	
	20°	40°	20°	40°
350mA (6.4W)	550lm	550lm	575lm	575lm
500mA (9.7W)	750lm	750lm	775lm	775lm