



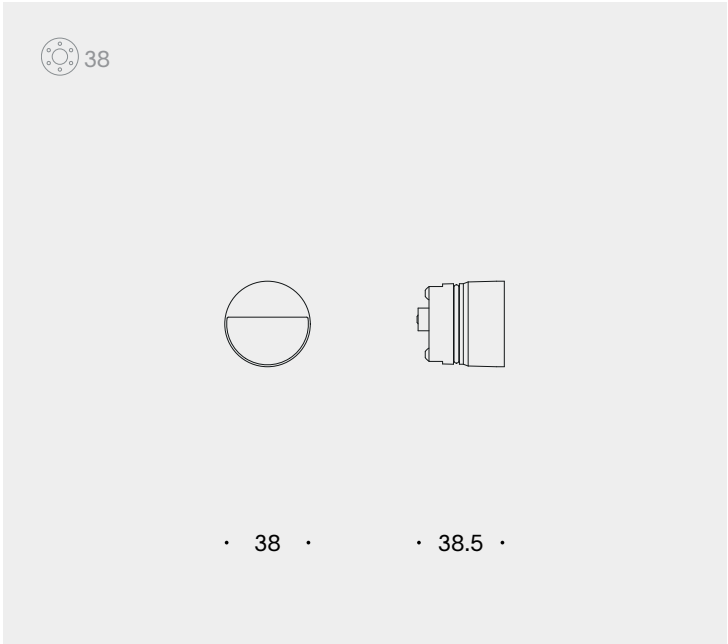

steplight mini | trimless

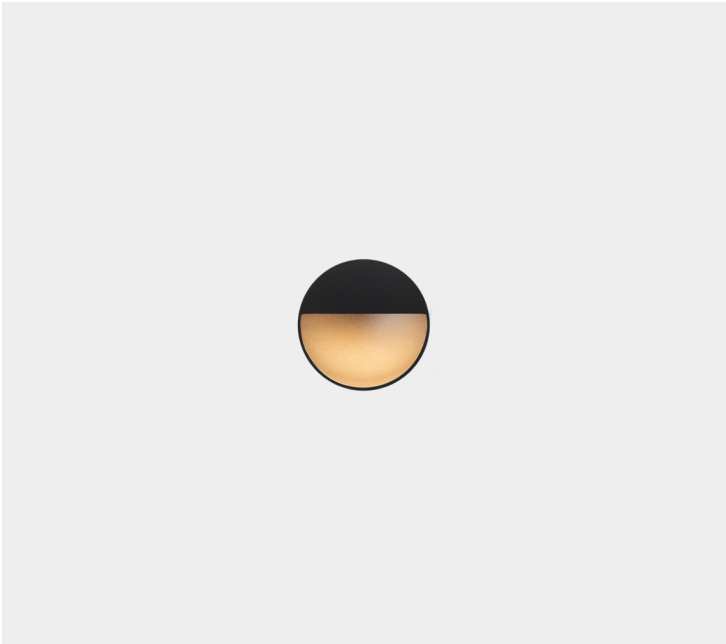

installation

light specs

lamp	LED
optic	diffuser
driver	excluded
IP	IP20
CRI	CRI 90+
SDCM	SDCM2
class	III
recess depth	38.5 mm
installation depth	driver remote: 43.5 mm
location	indoor
marking	CE

luminaire output

	2700K	3000K
24V (1.2W)	20lm	20lm

accessories

	installation
plaster ring Ø38	8000-0004
adj. thin plaster ring Ø38 (3.6-20mm)	8000-0124
clt csc ring Ø38	8000-0014
	drivers
IP68 24V constant voltage DALI pwm driver 60W	8000-0040
IP68 24V constant voltage DALI pwm driver 120W	8000-0041
IP68 24V constant voltage DALI pwm push driver 200W	8000-0042